LEGEND

BS = BOTH SIDES
RS = RIGHT SIDE
LS = LEFT SIDE

BURNHAM®
Commercial Boilers

LEGEND CONNECTIONS

A = 3" SUPPLY
B = 1-1/4" RETURN
C = 3" x 4" HANDHOLE
D = 1" WATER COLUMN
E = 3/4" AQUASTAT
F = 1-1/2" BOTTOM BLOWDOWN
G = 1-1/2" SURFACE BLOWOFF
H = 2" AUXILIARY CONNECTION
J = 1" SAFETY VALVE
K = 10" NOMINAL FLUE DIAMETER

RATINGS AND DATA

Shell Diameter : 48"
Gross Output – BHP : 40
Gross Output – MBH : 1339
Gross Output – Lbs/Hr : 1380
Net Rating – MBH : 1011
Net Rating – Sq. Ft. : 4213
Safety Valve – Lbs/Hr. : 1562

Heating Surface – Sq. Ft.
Fireside – 200
Firetubes
Number – 92
Diameter – 2" O.D.

Firing Rate
1000 BTU Gas (MBH) – 1674
140000 BTU/Gal Oil (GPH) – 11.7
150000 BTU/Gal Oil (GPH) – 10.9

Water Content
Pounds – 1988
Gallons (U.S.) – 239
Approximate Weight/LBS.
Dry – 4305
Wet – 6293

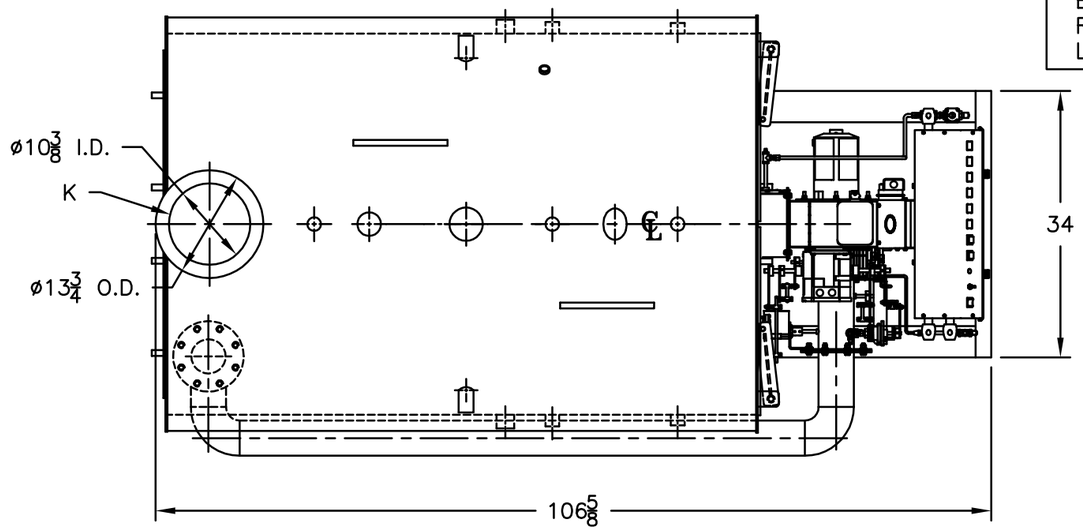

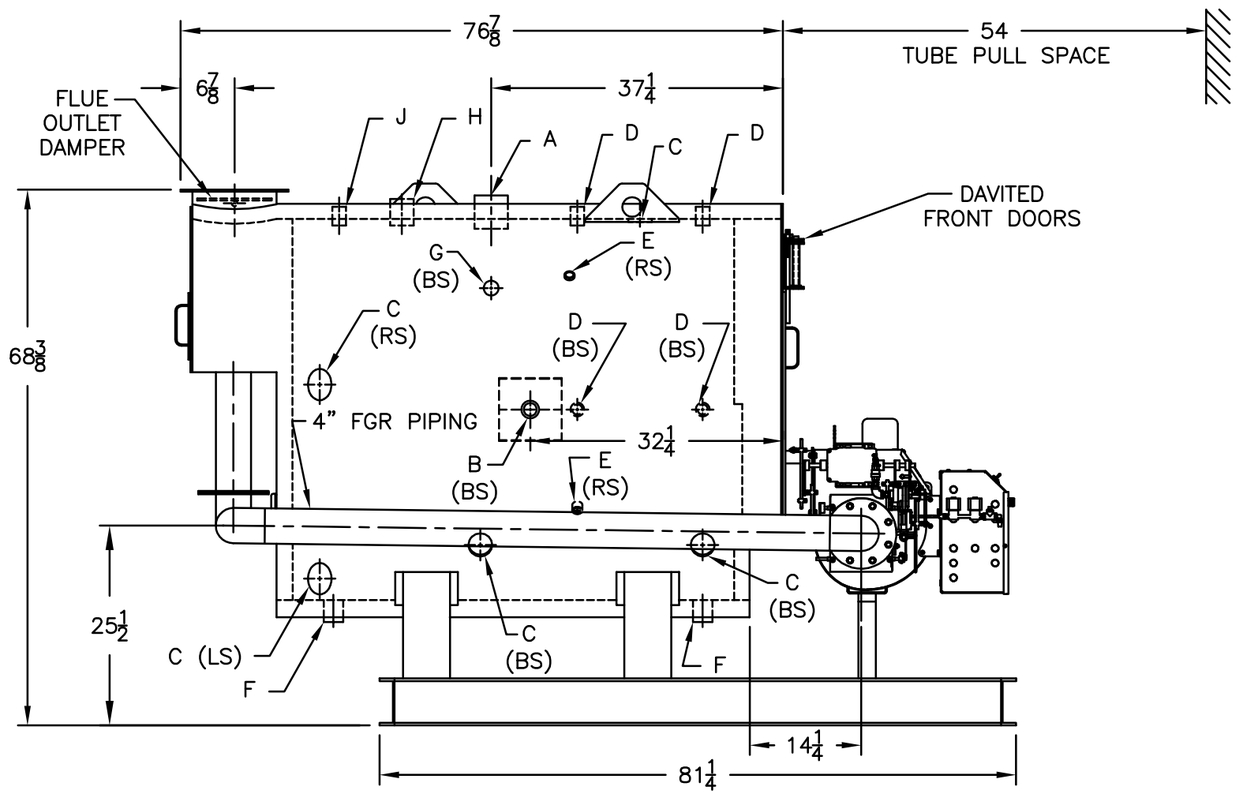

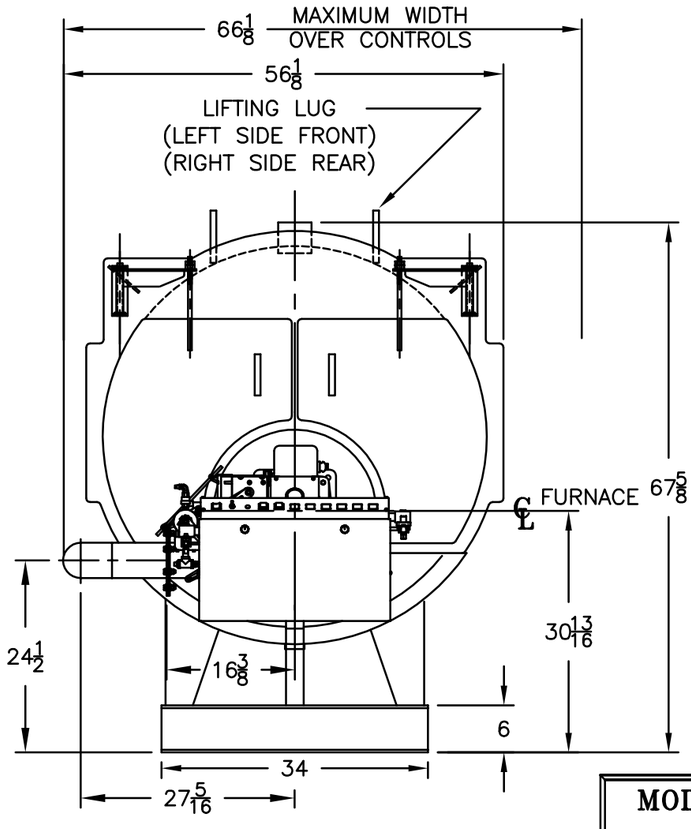

MODEL LN3P-40
40 BHP
POWERFLAME LNIC2
150 PSI STEAM

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE ALL CONNECTIONS ARE THREADED UNLESS OTHERWISE SPECIFIED
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION WHICH IS THE PROPERTY OF BURNHAM COMMERCIAL. THIS DOCUMENT MAY NOT BE REPRODUCED, TRANSFERRED OR USED, OR ITS CONTENTS DISCLOSED, WITHOUT THE WRITTEN PERMISSION OF THE OWNER.