
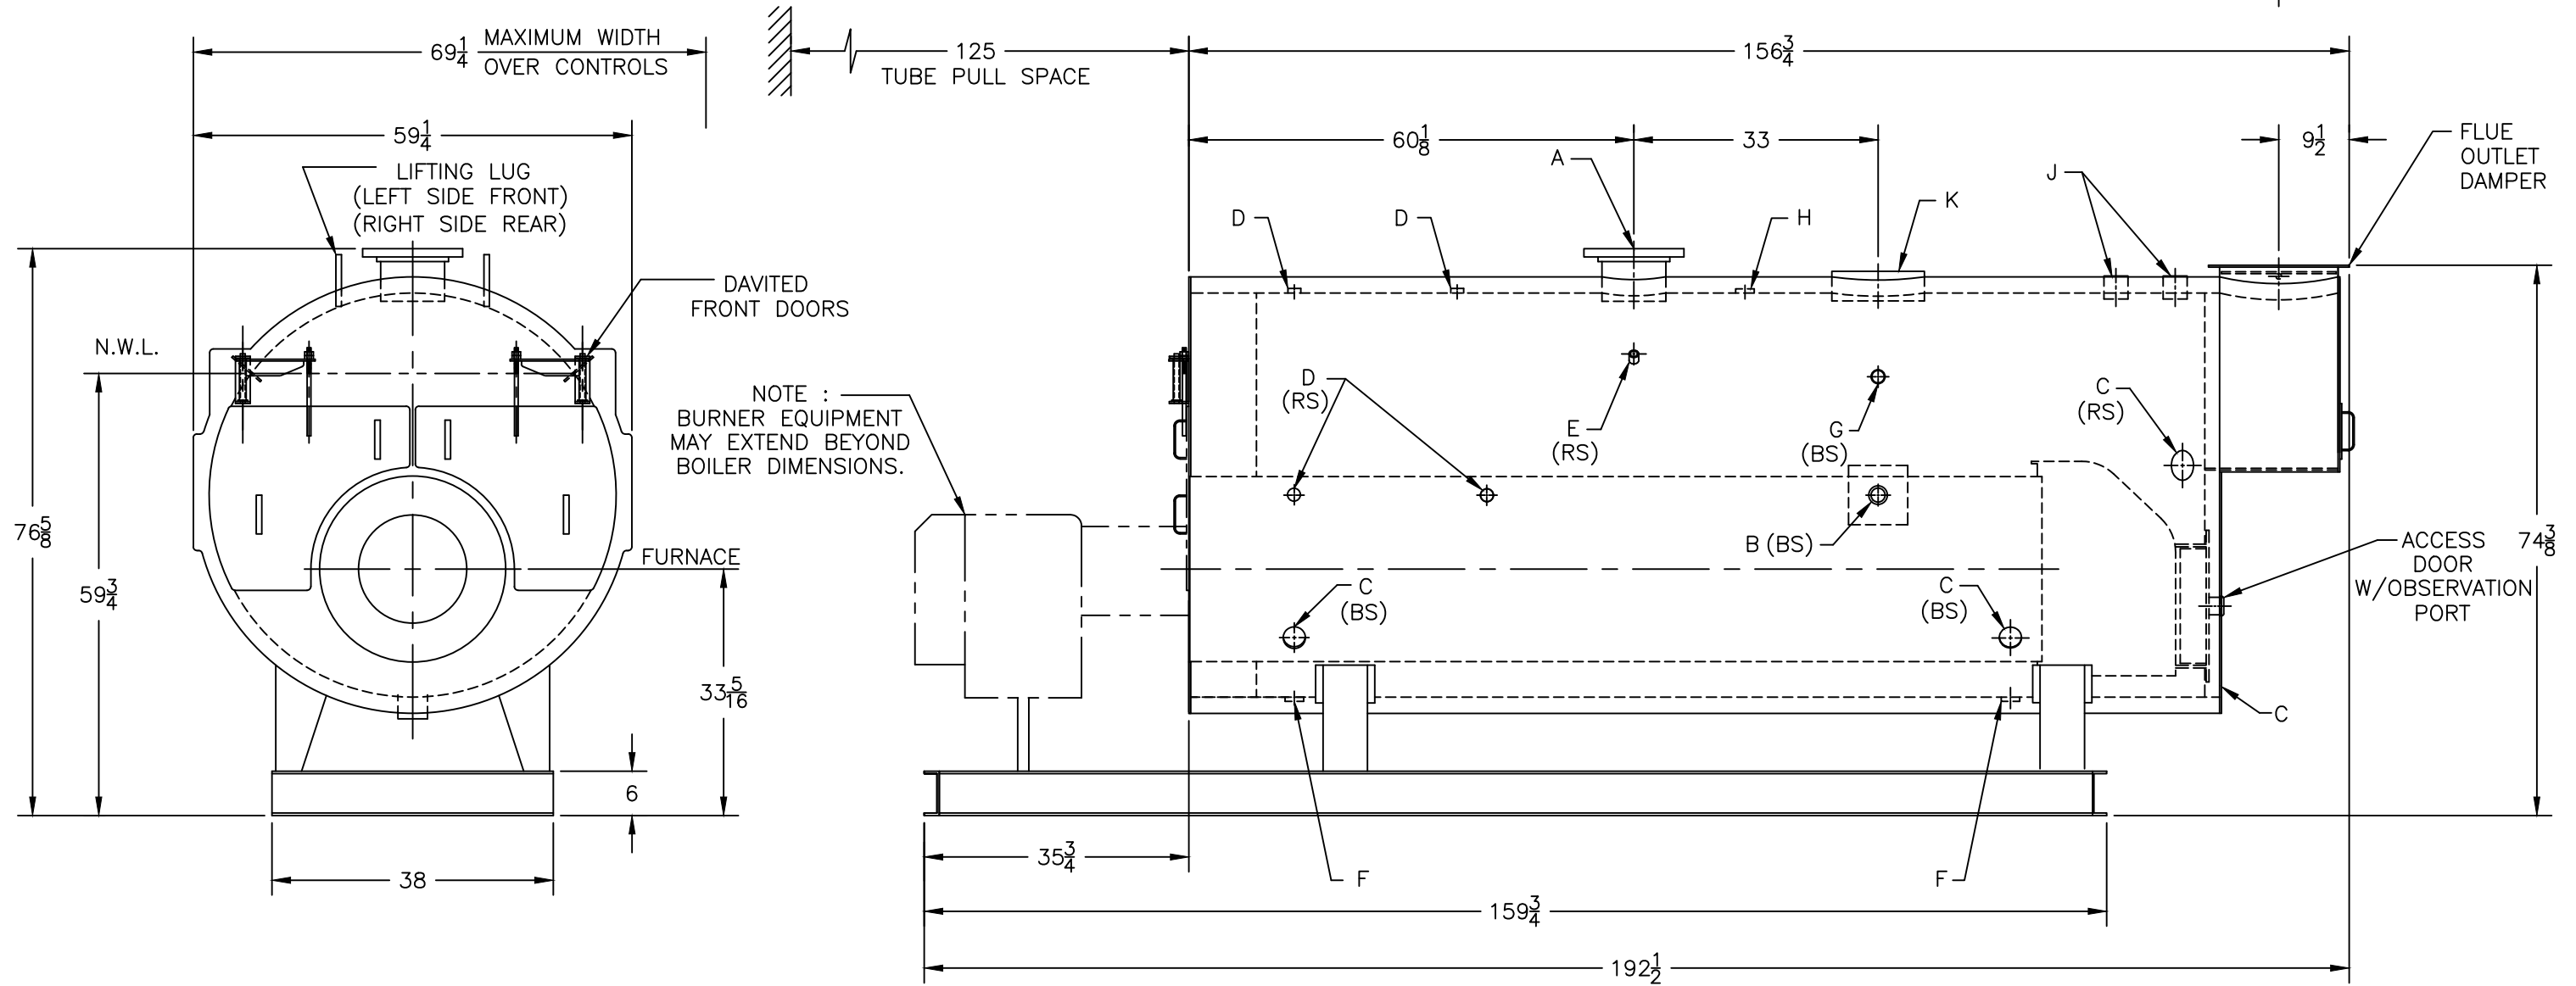


BURNHAM[®]
Commercial Boilers

LEGEND CONNECTIONS

- | | | |
|-----------------------|-----------------------------|-------------------------|
| A = 8" FLANGED SUPPLY | E = 3/4" AQUASTAT | J = 2" SAFETY VALVE (1) |
| B = 1-1/2" RETURN | F = 2" BOTTOM BLOWDOWN | 2-1/2" SAFETY VALVE (1) |
| C = 3" x 4" HANDHOLE | G = 2" SURFACE BLOWOFF | K = 12" X 16" MANHOLE |
| D = 1" WATER COLUMN | H = 2" AUXILIARY CONNECTION | |



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
ALL CONNECTIONS ARE THREADED UNLESS OTHERWISE SPECIFIED

RATINGS AND DATA

Shell Diameter : 54"
Gross Output - BHP : 200
Gross Output - MBH : 6695
Gross Output - Lbs/Hr : 6900
Safety Valve - Lbs/Hr. : 6900

Heating Surface - Square Feet
Fireside - 358
Firetubes
Number - 46
Diameter - 2-1/2"

Firing Rate
1000 BTU Gas (MBH) - 8369
140000 BTU/GAL (GPH) - 59.8
150000 BTU/GAL (GPH) - 55.8

MODEL 3L-200XH
200 BHP
15 PSI STEAM