BURNHAM®
Commercial Boilers

LEGEND CONNECTIONS

A = 4" SUPPLY
B = 4" RETURN
C = 3" x 4" HANDHOLE
D = 1" WATER COLUMN
E = 3/4" AQUASTAT
F = 1-1/2" DRAIN/WASHOUT
G = 1/2" TEMPERATURE GAUGE
H = 1-1/4" SAFETY/RELIEF VALVE
J = 1" AUXILLIARY CONNECTION
K = 12" NOMINAL FLUE DIAMETER

RATINGS AND DATA

Shell Diameter : 41 5/8"

Heating Surface – Sq. Ft.
Fireside – 320
Waterside – 345
Firetubes
Number – 90
Diameter – 2" O.D.

Furnace
Volume (Cubic Feet) – 50.5

Water Content
Water – 382 Gal. (U.S.)

Approximate Weight (Lb.)
Dry – 6400
Wet – 9580

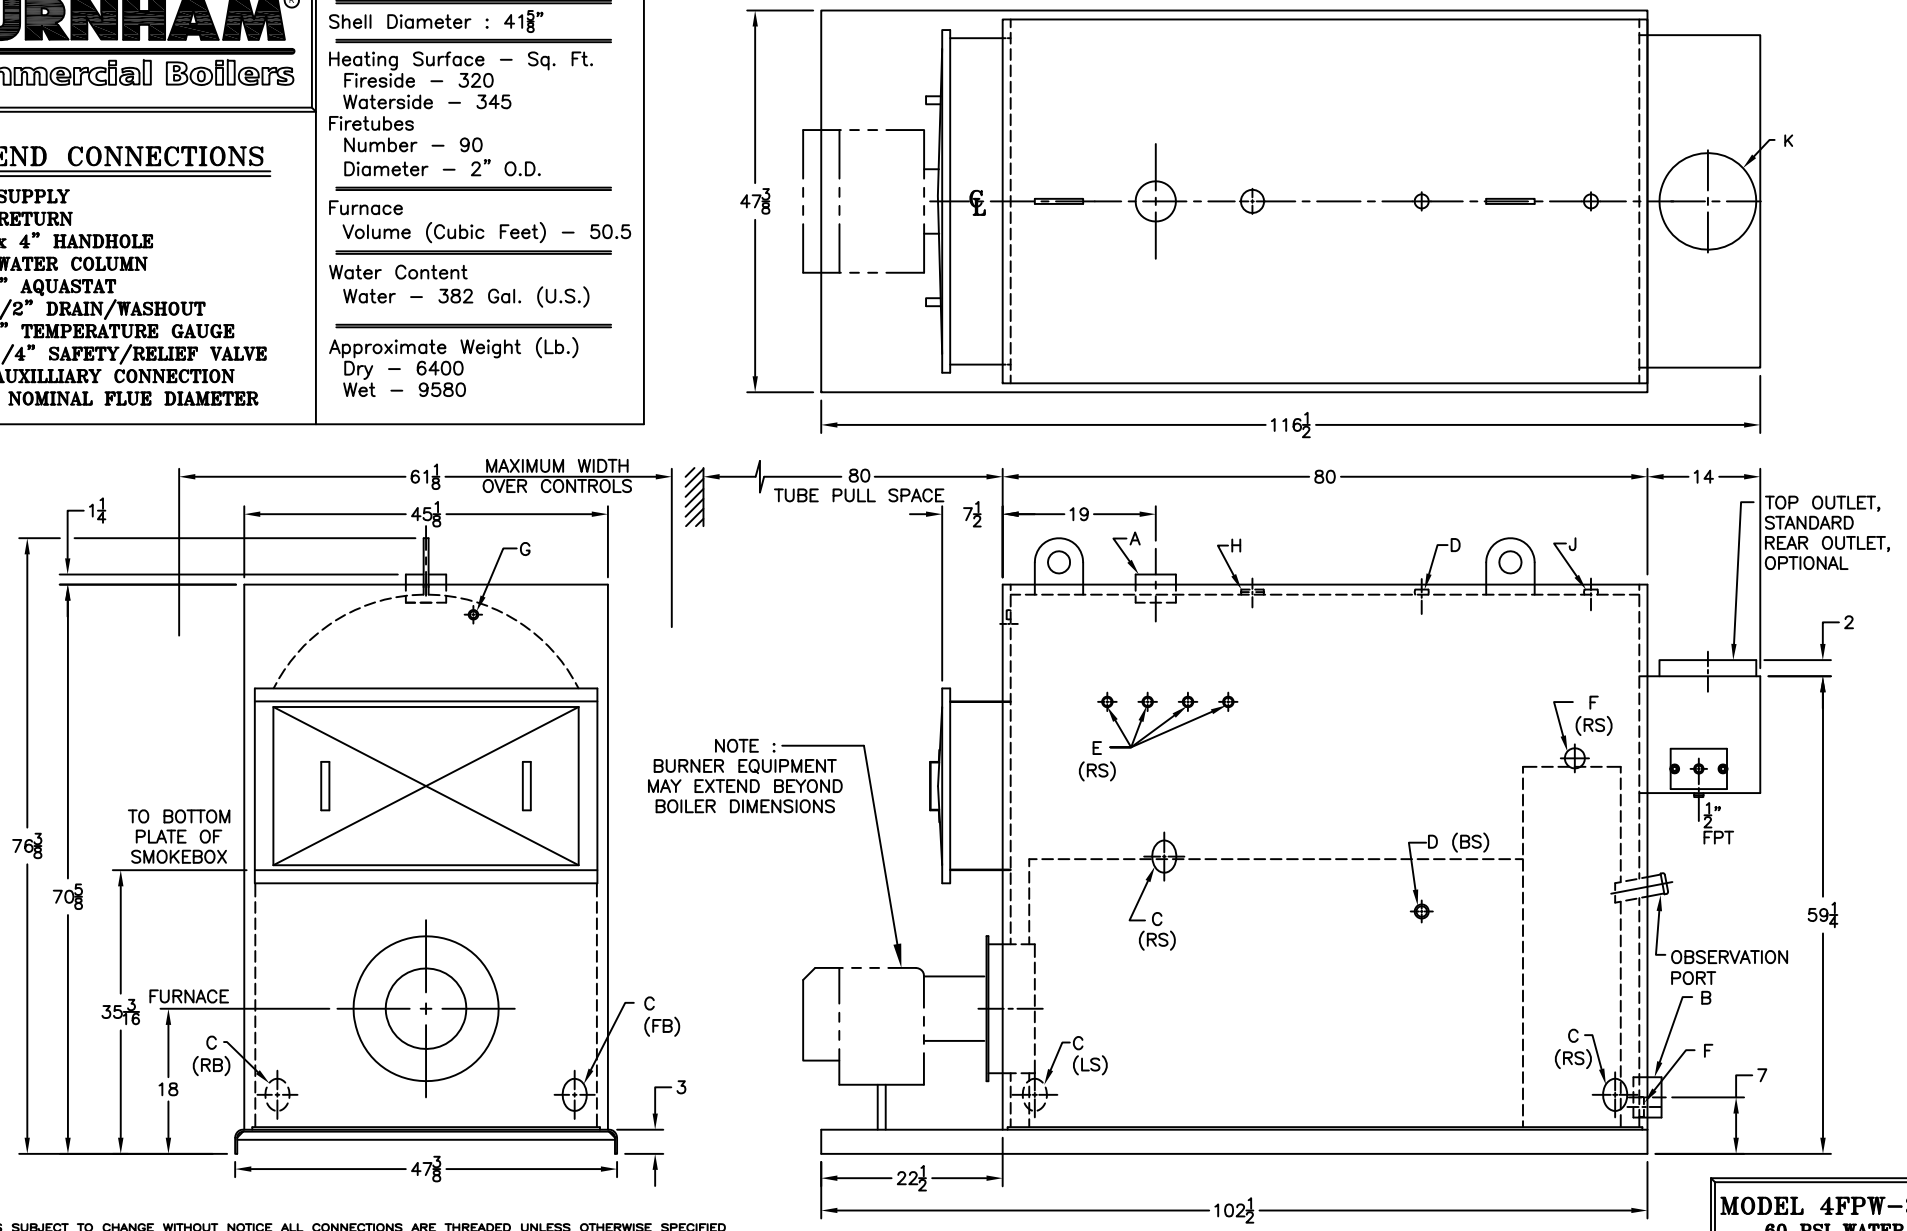

MODEL 4FPW-345
60 PSI WATER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE ALL CONNECTIONS ARE THREADED UNLESS OTHERWISE SPECIFIED
THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION WHICH IS THE PROPERTY OF BURNHAM COMMERCIAL. THIS DOCUMENT MAY NOT BE REPRODUCED, TRANSFERRED OR USED, OR ITS CONTENTS DISCLOSED, WITHOUT THE WRITTEN PERMISSION OF THE OWNER.

DEC 2009 TS-3-36-2